


PRODUCT INFORMATION

GT-09

CONTACT GLUING STATION FOR FLEXO FOLDERGLUER

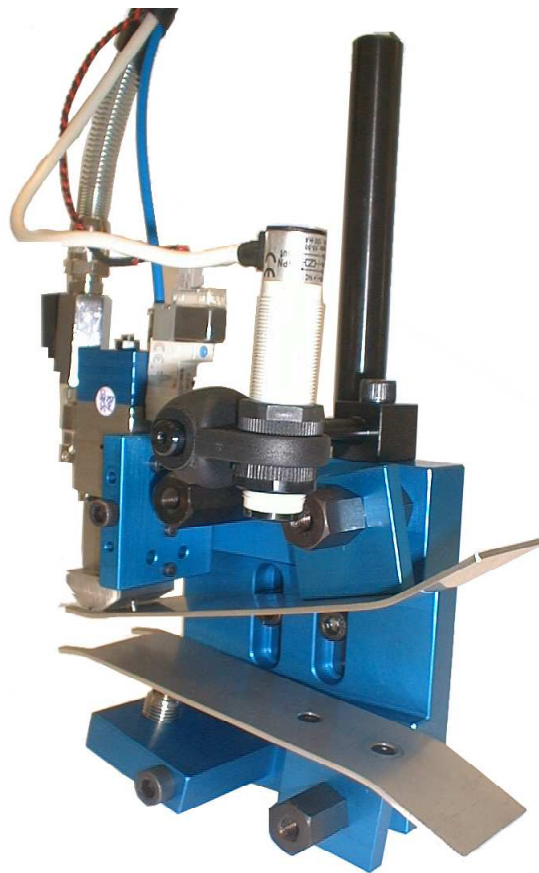

High speed production
Low maintenance, high reliability
Maximum cleaning
Simple and very easy to use

TECHNICAL FEATURES

The GT-09 gluing station is equipped as a contact pneumatic station using 1 GT-09 glue gun. This glue station is designed for fast casemaker/flexo folder-gluer machines. Stainless steel glue gun with gun head in aluminium alloy. This pneumatic glue station is resistant, strong and long lasting. The station comes with a bracket for the photocell. The GT-09 glue gun has an adjustable screw for glue flow control. Stainless steel and derlin glue valve. Distance between glue lines: 15 mm 3 line nozzle and 24 mm 4 line nozzle

Max shots: 28 shots/sec.

Max glue pressure = 6 bar

Glue viscosity range = Min 500 mPas, Max 1200 mPas


Glue station dimensions without bracket and accessories: L = 280,5 mm, H = 220 mm, W = 100,5 mm

Weight without bracket and accessories: 3,2 Kg (with 1 glue gun)

Power: P Max = 1 W

Standard coil = 24 VDC 1 W

Standard nozzle = 3 or 4 lines of glue on request

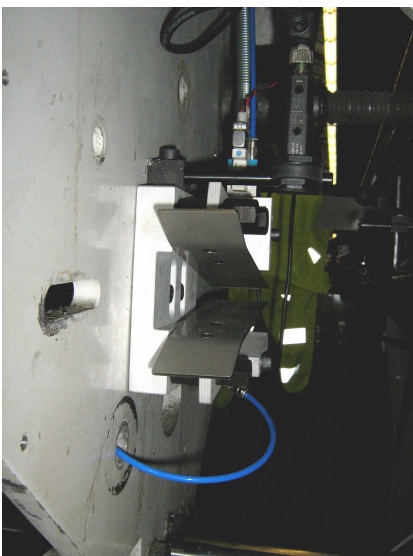

Low pressure gluing station installed on a flexo folder-gluer machine

The LP gluing station is tested at 20° air temperature and with a 900 mPas glue viscosity